

CORROSION RESISTANT STEELS - MARTENSITIC, SEMI- MARTENSITIC AND FERRITIC STEELS

Available Product Variants

Plates

Product Description

Components for mechanical, marine and plant engineering, pump and compressor parts, sucker rods, curring surgical instruments.

Martensitic chromium steel with a carbon content permitting to obtain high tensile strength levels by heat treatment. Increased chromium content molybdenum addition account for good resistance to sea water, organic acids and nitric acid, as well as excellent resistance to crevice corrosion. The steel presents satisfactory high temperature strength, excellent wear resistance and good antifriction properties. Surface finish for optimum corrosion resistance: fine ground or polished.

Applications

- > Components for Chemical plants (incl. LNG, FGD, Urea, LDPE, etc.)
- > Other Oil and Gas + CPI components
- > Tubular Products, Flanges, Fittings

Technical data

Material designation		Standards	
1.4122	SEL	10088-1	EN ISO
X39CrMo17-1	EN	10088-2	
		10088-3	

Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	Ni
0.38	0.4	0.65	16	1	0.8

Delivery condition

Annealed	
Hardness (HB)	max. 280



Heat treatment



Annealing

Temperature	750 to 850 °C	Furnace, air
-------------	---------------	--------------

Hardening and Tempering

Temperature	980 to 1,060 °C	Oil
-------------	-----------------	-----

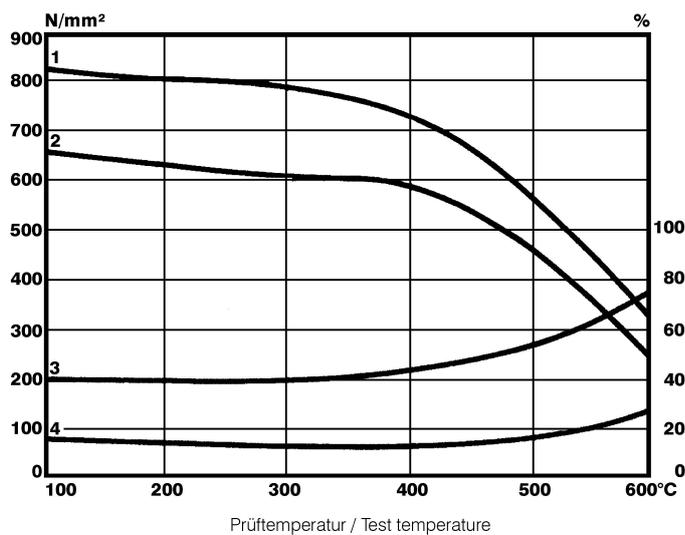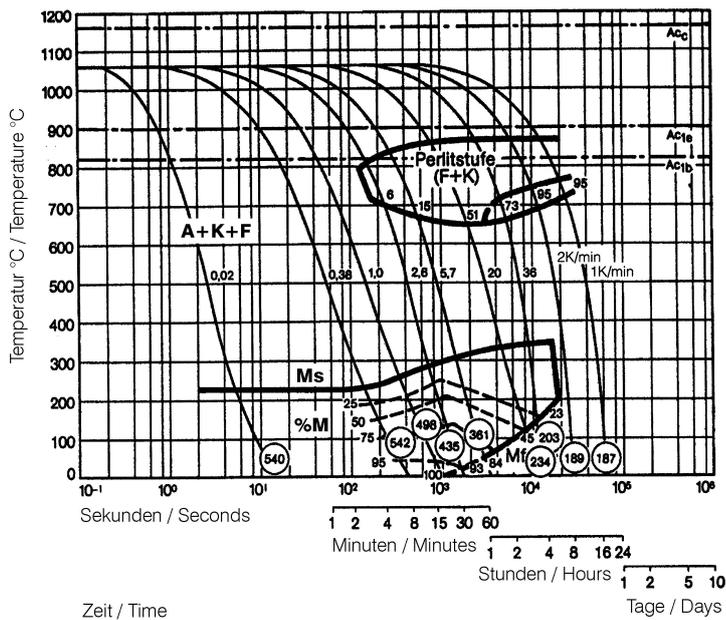

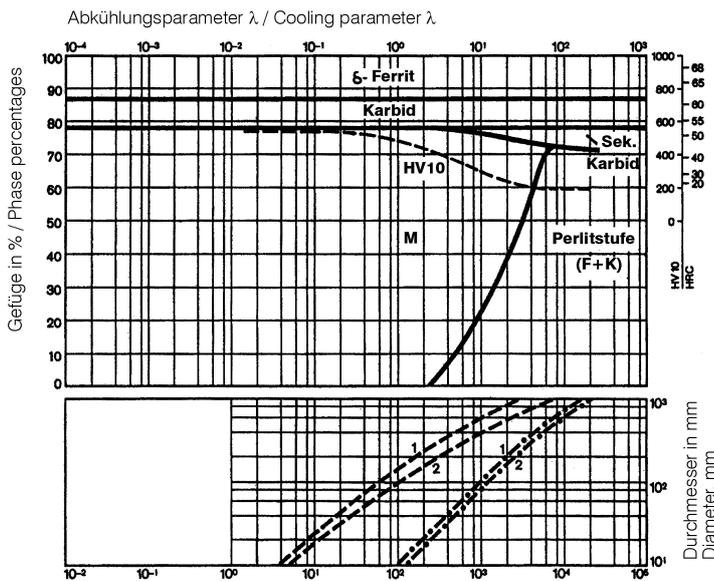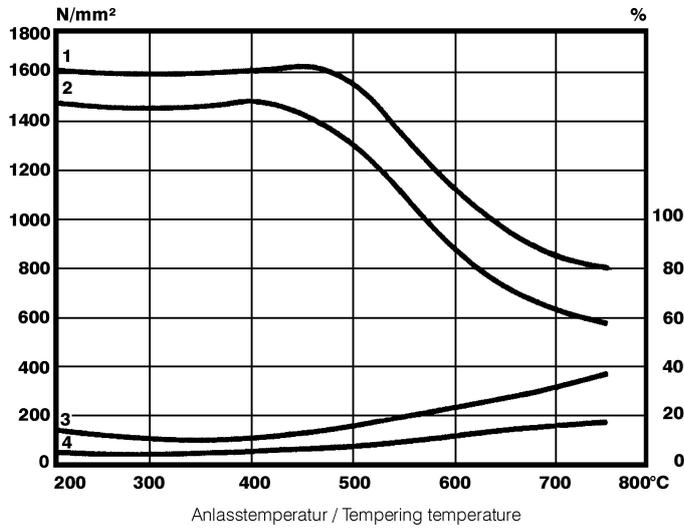

Kühlzeit von 800°C auf 500°C in Sekunden / Cooling time in sec. from 800°C to 500°C

Physical Properties

Density	7.7	[kg/dm ³]
Thermal conductivity	15	[W/(m.K)]
Specific heat	430	[kJ/kg K]
Spec. electrical resistance	0.8	[Ohm.mm ² /m]
Modulus of elasticity	215	[10 ³ N/mm ²]

Thermal Expansions between 20°C | 68°F and ...

Temperature (°C)	100	200	300	400
Thermal expansion (10 ⁻⁶ m/(m.K))	10.4	10.8	11.2	11.6

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at

<https://www.voestalpine.com/bohler-edelstahl/de/>



ONE STEP AHEAD.