

HIGH SPEED STEELS

Application Segments

Cutting Tools

Available Product Variants

Wire

Product Description

Cobalt-alloyed molybdenum high-speed steel with high hardness, excellent cutting performance, high compressive strength, and hot hardness, combined with good toughness.
This HSS grade is used for bimetal saw bands and woodworking tools.

Process Melting

Airmelted

Properties

- > Toughness & Ductility : high
- > Wear Resistance : good
- > Compressive strength : high
- > Edge Stability : good
- > Grindability : very high
- > Hot Hardness (red hardness) : high

Applications

- > Special Cutting Tools

Chemical composition (wt. %)

C	Si	Mn	Cr	Mo	V	W	Co
0.75	0.3	0.25	4.1	5	1	1	8

Material characteristics

	Compressive strength	Grindability	Red hardness	Toughness	Wear resistance	Edge Stability
BÖHLER S504SF	★★★	★★★★	★★★	★★★	★★	★★★
BÖHLER S500SF	★★★★	★★★	★★★★	★★	★★★★	★★★★

Heat treatment

Annealing

Temperature	770 to 840 °C	Controlled slow cooling in furnace (10 to 20°C / h) to approx. 600°C (1110°F), air cooling.
-------------	---------------	---


Stress relieving

Temperature	600 to 650 °C	Slow cooling furnace. To relieve stresses set up by extensive machining or in tools of intricate shape. After through heating, hold in neutral atmosphere for 1 to 2 hours.
-------------	---------------	---

Hardening and Tempering

Temperature	1,140 to 1,180 °C	Salt bath, vacuum Preheating: 1st stage ~ 500 °C, 2nd stage ~ 850 °C, 3rd stage ~1050 °C Austenitising: 1140 - 1180 °C, holding time after complete heating 80 seconds, maximum 150 seconds, to avoid material damage due to overheating. Quenching: oil, warm bath (500 - 550 °C), gas In continuous heat treatment, temperatures and times may vary depending on the specific heat treatment process.
Temperature	550 to 580 °C	Slow heating to tempering temperature immediately after austenitising. Dwell time in the furnace at least 2 hours Slow cooling to room temperature 3 tempering cycles recommended Hardness see tempering chart In continuous heat treatment, temperatures and times may vary depending on the specific heat treatment process.

Tempering Chart

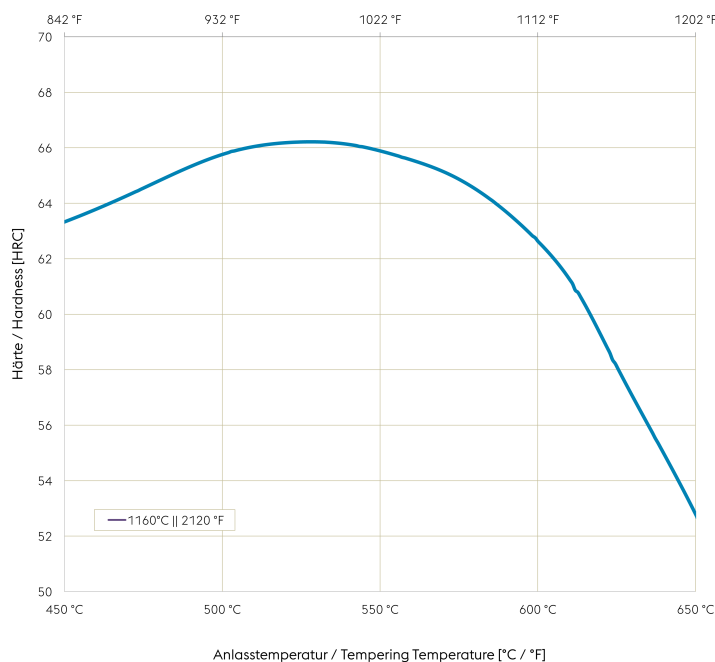

Saltbath

Austenitising Temperature: 1160 °C || 2120 °F

Specimen size: Ø 5,5 mm

If other available product variants are listed in addition to long products, please note that these may differ in terms of melting process, technical data, delivery and surface condition as well as available product dimensions. For mandatory technical specifications, other requirements and dimensions, please contact our regional voestalpine BÖHLER sales companies. The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. Measurement data are laboratory values and can deviate from practical analyses. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.

voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, AT

T. +43/50304/20-0

E. info@bohler-edelstahl.at

<https://www.voestalpine.com/bohler-edelstahl/de/>

voestalpine

ONE STEP AHEAD.